




- **Application** Protection & bundling of hydraulic hose & cables
- **Standards** N/A
- **Temperature Range** low -60°C high + 100° C
- **Material** High Density Polyethylene (HDPE)
- **Thickness** Varies dependant on diameter
- **Colours** Black, yellow, red, green, blue
- **Resistance** Resistant to Acids, Oils, Solvents
- **Hardness** 66 SHw 5 (ISO 868)
- **Density** 0.96 gr/cc (ISO 1183)
- **Tensile strength** 30,00 mpa
- **UV Resistance** UV Stabilised (excellent resistance)
- **Ozone Resistance** Excellent resistance

HEAVY DUTY SPIRAL WRAP

Part Number	Size MM	Colour	Pack Qty. (Mtrs)	O.D. MM (Nominal)	I.D. MM (Nominal)	Wall Thickness MM	Band Width MM
HDS-9X12-50	12		50	12	9	1.5	10-11
HDS-13X16-20	16		20	16	13	1.5	10-11
HDS-16X20-20	20		20	20	16	2	18-19
HDS-20X25-20	25		20	25	20	2.5	20-21
HDS-27X32-20	32		20	32	27	2.5	22-23
HDS-34X40-20	40		20	40	34	3	25-26
HDS-43X50-20	50		20	50	43	3.5	29-31
HDS-56X64-20	63		20	64	56	4	38-40
HDS-67X76-20	75		20	76	67	4.5	43-45
HDS-80X90-20	90		20	90	80	5	44-47
HDS-100X111-15	110		15	111	100	5	50-53

Other colours and sizes available upon request
based on minimum order quantity

Rail Spiral EN 45545 Approved

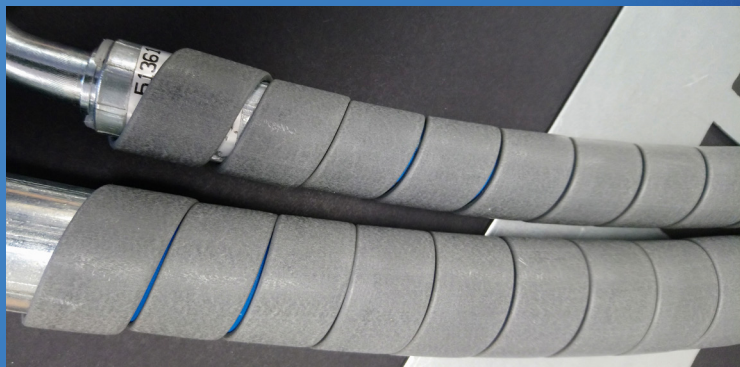

- **Application** Protection & bundling of hydraulic pipes where a high degree of self-extinguishing (UL94) and flame retardency (V0) is required.
- **Standards** UNI EN 45545 - 2: 2015 (for hazard levels HL1-HL2- HL3 set of requirements R22 and R23)
- **Temperature Range** low -30°C high + 110° C
- **Flame resistance** UL 94. V0
- **Thickness** Varies dependant on diameter
- **Colours** Grey
- **Resistance** Resistant to Acids, Oils, Solvents
- **Hardness** Shore D: 68
- **Density** 105 gr/ml (ASTM D-792)
- **Tensile strength at yield** -1/-2 Mpa 18 (ISO 527)

Part Number	Size MM	Colour	Pack Qty. (Mtrs)	O.D. MM (Nominal)	I.D. MM (Nominal)	Wall Thickness MM	Band Width MM
RAIL16C	16	Grey	50	16	13	1.5	10-11
RAIL20C	20	Grey	50	20	16	2	18-19
RAIL25C	25	Grey	50	25	20	2.5	20-21
RAIL32C	32	Grey	50	32	27	2.5	22-23
RAIL40C	40	Grey	50	40	34	3	25-26
RAIL50C	50	Grey	20	50	43	3.5	29-31
RAIL75	75	Grey	20	76	67	4.5	43-45